


## 2.4mm - 1.85mm系列间转换器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	不锈钢SU303 钝化
频率范围	DC ~ 50GHz	内导体	铍铜 镀金
连接器耐久性	≥500次	绝缘体	PEI
温度范围	-60°C~+165°C		

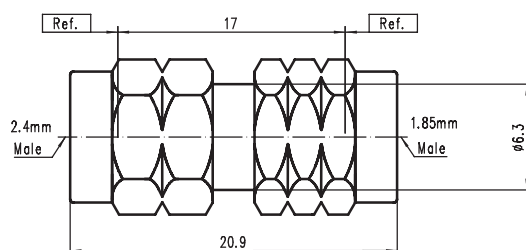

CODE: 100104

TYPE: 2.4mm / 1.85mm - JJG


VSWR: DC - 50GHz...1.20 : 1(max)

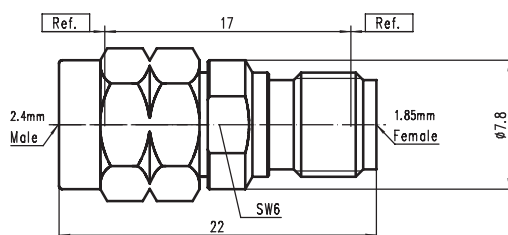

CODE: 100105

TYPE: 2.4mm / 1.85mm - JKG


VSWR: DC - 50GHz...1.20 : 1(max)

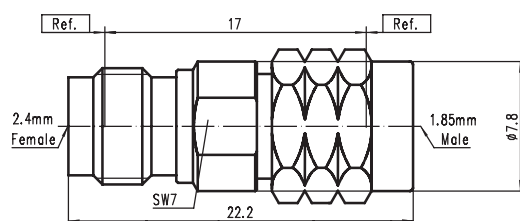

CODE: 100106

TYPE: 2.4mm / 1.85mm - KJG

VSWR: DC - 50GHz...1.20 : 1(max)

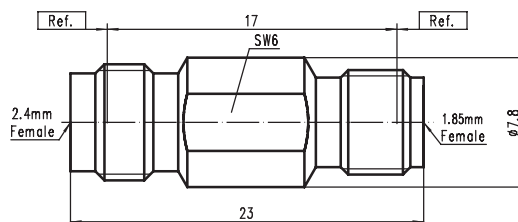

CODE: 100107

TYPE: 2.4mm / 1.85mm - KKG

VSWR: DC - 50GHz...1.20 : 1(max)