


2.92mm - 1.85mm系列间转接器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	不锈钢SU303 钝化
频率范围	DC ~ 40GHz	内导体	铍铜 镀金
连接器耐久性	≥500次	绝缘体	PEI
温度范围	-60°C ~ +165°C		

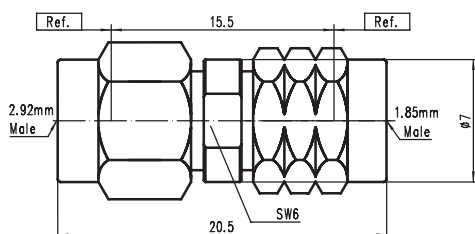

CODE: 100100

TYPE: 2.92mm / 1.85mm - JJG


VSWR: DC - 40GHz...1.20: 1(max)

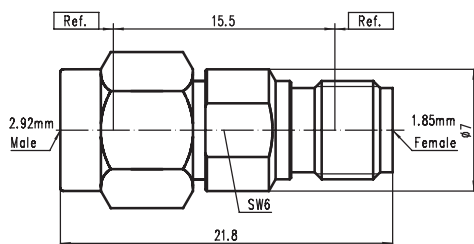

CODE: 100101

TYPE: 2.92mm / 1.85mm - JKG


VSWR: DC - 40GHz...1.20: 1(max)

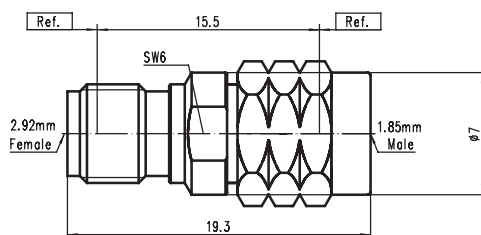

CODE: 100102

TYPE: 2.92mm / 1.85mm - KJG

VSWR: DC - 40GHz...1.20 : 1(max)

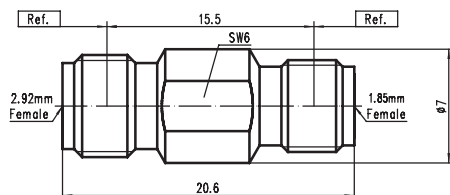

CODE: 100103

TYPE: 2.92mm / 1.85mm - KKG

VSWR: DC - 40GHz...1.20 : 1(max)