


2.92mm – SSMP系列间转换器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	不锈钢SU303 钝化
频率范围	DC ~ 40GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PEI
温度范围	-60°C~+165°C		

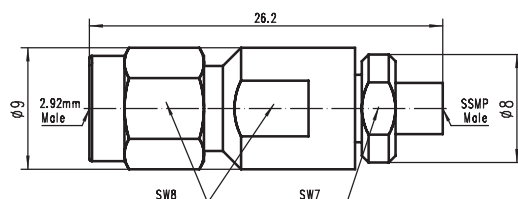

CODE: 100161

TYPE: 2.92mm / SSMP - JJG


VSWR: DC - 40GHz...1.20 : 1(max)

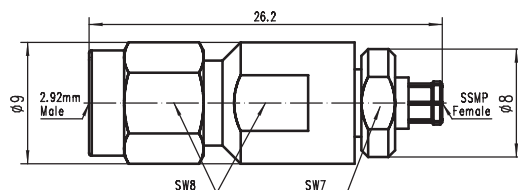

CODE: 100162

TYPE: 2.92mm / SSMP - JKG


VSWR: DC - 40GHz...1.20 : 1(max)

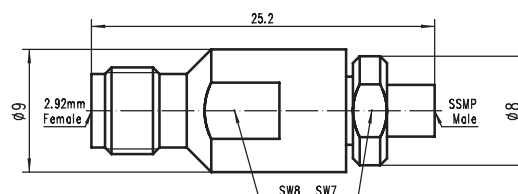

CODE: 100163

TYPE: 2.92mm / SSMP - KJG

VSWR: DC - 40GHz...1.20 : 1(max)

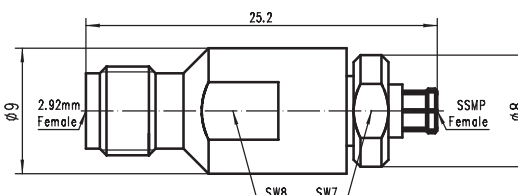

CODE: 100164

TYPE: 2.92mm / SSMP - KKG

VSWR: DC - 40GHz...1.20 : 1(max)