



N - SMA 系列间转换器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	黄铜 镀金 或镀镍
频率范围	DC ~ 11GHz	内导体	镀铜 或黄铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃ ~ +165℃		

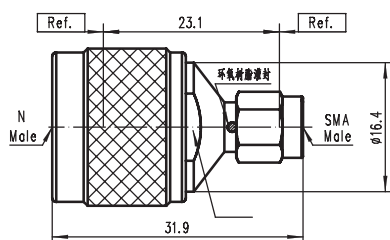


CODE: 100139
 TYPE: N / SMA - JJ
 VSWR: DC - 11GHz...1.25 : 1(max)

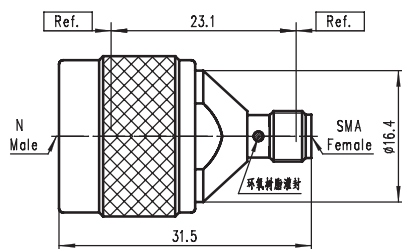

CODE: 100140
 TYPE: N / SMA - JK
 VSWR: DC - 11GHz...1.25 : 1(max)

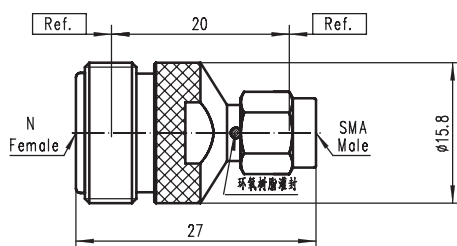

CODE: 100141
 TYPE: N / SMA - KJ
 VSWR: DC - 11GHz...1.25 : 1(max)

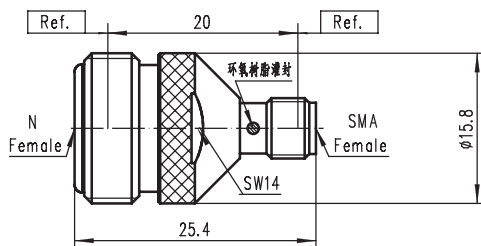

CODE: 100142
 TYPE: N / SMA - KK
 VSWR: DC - 11GHz...1.25 : 1(max)