



SMA系列内转接器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	黄铜 镀金
频率范围	DC ~ 18GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃~+165℃		

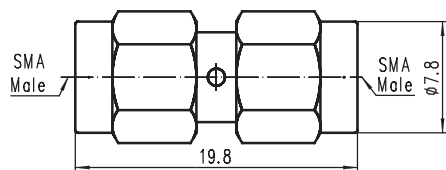


CODE: 100039
 TYPE: SMA - JJ
 VSWR: DC - 18GHz...1.25 : 1(max)

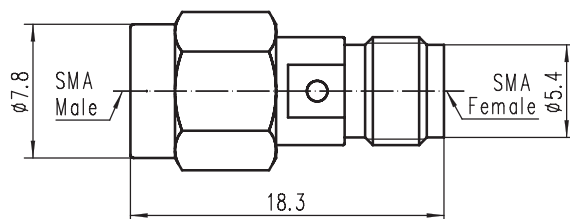

CODE: 100040
 TYPE: SMA - JK
 VSWR: DC - 18GHz...1.25 : 1(max)

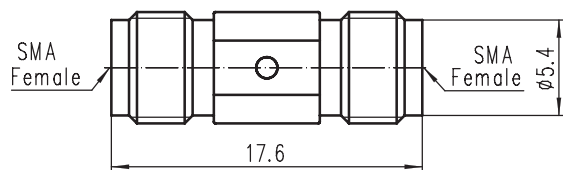

CODE: 100041
 TYPE: SMA - KK
 VSWR: DC - 18GHz...1.25 : 1(max)

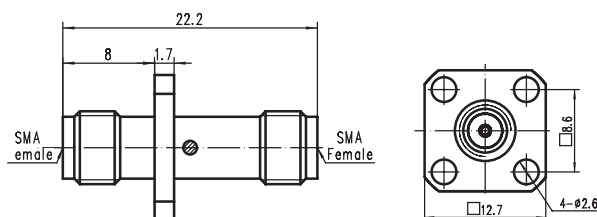

CODE: 100149
 TYPE: SMA - KFK
 VSWR: DC - 18GHz...1.25 : 1(max)