


通用级衰减器 < 10W

通用级同轴固定衰减器主要用于普通测试和系统应用。上海图越能提供频率范围DC到18GHz通用衰减器，默认型号为输入公头，输出母头。如需精密产品请查看精密级衰减器。

命名规则

AXX-XX -XX- XXW

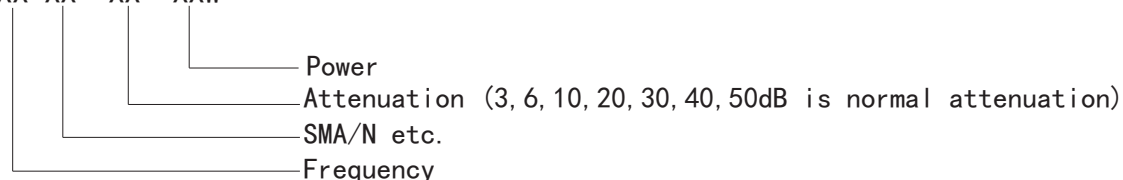

- 型号：A18-Sx-XX-2W Connector：SMA 平均功率：2W



Fr. Range (GHz)	Atten & Accuracy (dB)				VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40			
DC-8	±0.4	±0.6	±0.8	±1.0	1.20	Al 203	Φ9*26
DC-12.4					1.30		
DC-18	±0.5	±0.7	±0.8	±1.0	1.40		

- 型号：A18-Sx-XX-5W Connector：SMA 平均功率：5W

Fr. Range (GHz)	Atten & Accuracy (dB)				VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40			
DC-8	±0.4	±0.6	±0.8	±1.0	1.20	Al 203	Φ15.8*37
DC-12.4					1.30		
DC-18	±0.5	±0.7	±0.8	±1.0	1.40		

- 型号：A18-Nx-XX-2W Connector：N 平均功率：2W

Fr. Range (GHz)	Atten & Accuracy (dB)				VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40			
DC-8	±0.4	±0.6	±0.8	±1.0	1.20	Al 203	Φ20*70
DC-12.4					1.30		
DC-18	±0.5	±0.7	±0.8	±1.0	1.40		

- 型号：A18-Nx-XX-5W Connector：N 平均功率：5W

Fr. Range (GHz)	Atten & Accuracy (dB)				VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40			
DC-8	±0.4	±0.6	±0.8	±1.0		Al 203	Φ20*70
DC-12.4							
DC-18	±0.5	±0.7	±0.8	±1.0			