



SMA系列内转接器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	不锈钢SU303 钝化
频率范围	DC ~ 27GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃~+165℃		

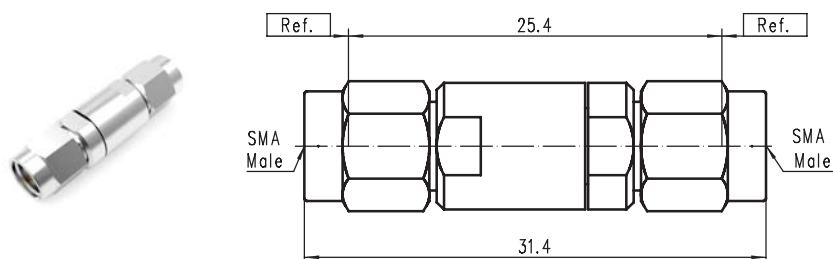


CODE: 100013
TYPE: SMA - JYG
VSWR: DC - 27GHz...1.15 : 1(max)

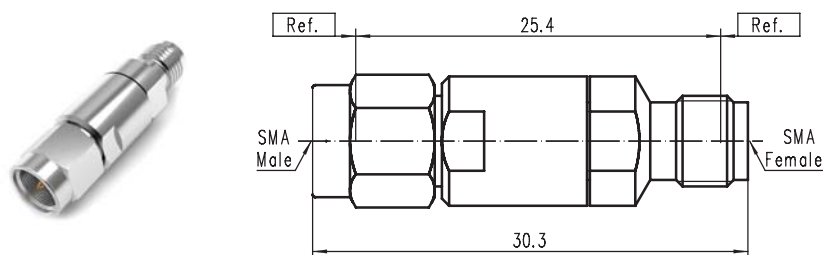

CODE: 100014
TYPE: SMA - JKG
VSWR: DC - 27GHz...1.15 : 1(max)

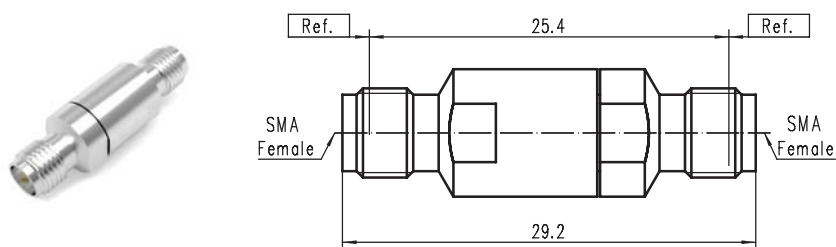

CODE: 100015
TYPE: SMA - KKG
VSWR: DC - 27GHz...1.15 : 1(max)

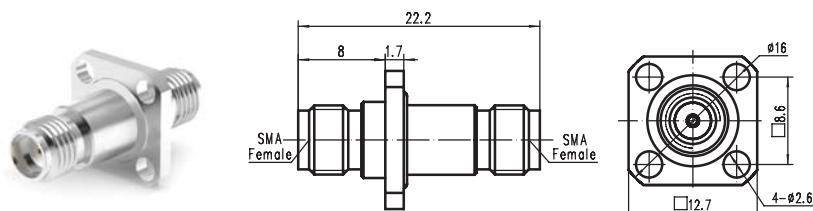

CODE: 100063
TYPE: SMA - KFKG
VSWR: DC - 27GHz...1.15 : 1(max)