


射频同轴衰减器

同轴衰减器主要用于测试测量以及设备的配套附件。我司能提供频率范围从DC到50GHz衰减器，包括精密型和标准型等类别，满足顾客的需要。

命名规则

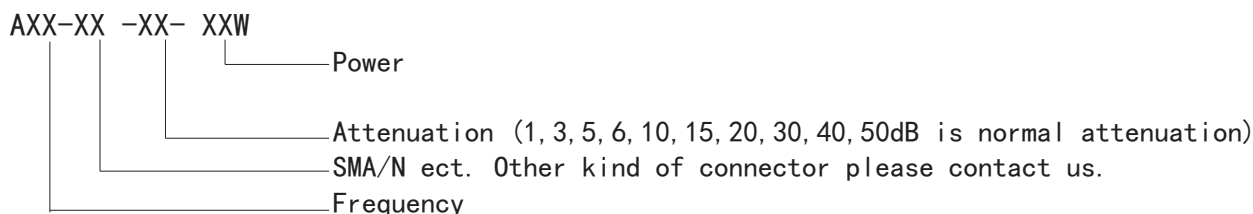

- 型号：A18-S-XX-1W 平均功率：1W Connector：SMA-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)				VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40			
DC-8					1.20	Al 203	Φ9*26
8-12.4	±0.5	±0.8	±1.0	±1.0	1.30	Al 203	Φ9*26
12.4-18					1.35	Al 203	Φ9*26

- 型号：A18-N-XX-2W 平均功率：2W Connector：N-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)				VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40			
DC-8					1.20	Al 203	Φ20*33
8-18	±0.5	±0.8	±1.0	±1.0	1.35	Al 203	Φ20*33

- 型号：A18-N-XX-5W 平均功率：5W Connector：N-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)				VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40			
DC-6					1.15	Al 203	
DC-8	±0.4	±0.6	±1.0	±1.2	1.25	Al 203	Φ25*71.6
DC-18	±0.5	±0.7	±1.0	±1.2	1.35	Al 203	

- 型号：A12.4-N-XX-10W 平均功率：10W Connector：N-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)				VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40			
DC-6					1.20		
DC-8	±0.4	±0.6	±1.0	±1.2	1.25	BeO	Φ30*49.5
DC-18	±0.5	±0.7	±1.0	±1.2	1.35		

射频同轴衰减器

- 型号: A18-N-XX-20W 平均功率: 20W Connector: N-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)					VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40	41-50			
DC-6						1.20	BeO	Φ44*54.3
DC-8	±0.4	±0.6	±1.0	±1.2	±1.5	1.25		
DC-18	±0.5	±0.7	±1.0	±1.2	±1.5	1.35		

- 型号: A18-N-XX-30W 平均功率: 30W Connector: N-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)					VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40	41-50			
DC-6						1.20	BeO	Φ44*70
DC-8	±0.4	±0.6	±1.0	±1.2	±1.5	1.25		
DC-18	±0.5	±0.7	±1.0	±1.2	±1.5	1.35		

- 型号: A18-N-XX-50W 平均功率: 50W Connector: N-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)					VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40	41-50			
DC-6						1.20	BeO	Φ64*70
DC-8	±0.4	±0.6	±1.0	±1.2	±1.5	1.25		
DC-18	±0.5	±0.7	±1.0	±1.2	±1.5	1.35		

- 型号: A18-N-XX-100W 平均功率: 100W Connector: N-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)					VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40	41-50			
DC-6						1.20	BeO	Φ64*121
DC-8	±0.5	±0.7	±1.0	±1.2	±1.5	1.25		Φ64*121
DC-18						1.35		

- 型号: A18-N-XX-200W 平均功率: 200W Connector: N-50JK



Fr. Range (GHz)	Atten & Accuracy (dB)					VSWR (Max)	Material	Size (mm)
	1-10	11-20	21-30	31-40	41-50			
DC-6						1.20	BeO	224*110*110
DC-18	±0.5	±0.7	±1.0	±1.2	±1.5	1.35		224*110*110