


## 3.5mm - 2.92mm系列间转换器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	不锈钢SU303 钝化
频率范围	DC ~ 33GHz	内导体	铍铜 镀金
连接器耐久性	≥500次	绝缘体	PEI
温度范围	-60°C~+165°C		

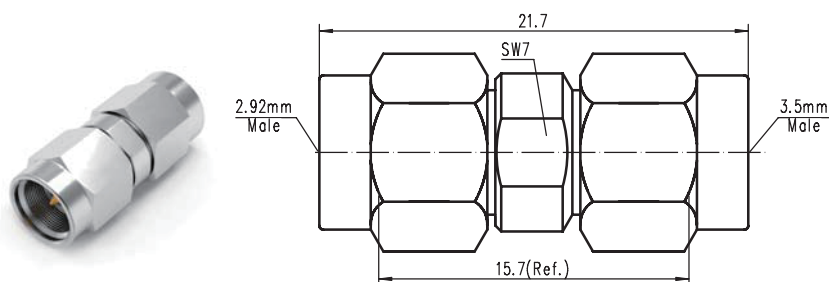

CODE: 100080

TYPE: 3.5mm / 2.92mm - JJJ


VSWR: DC - 33GHz...1.15 : 1(max)

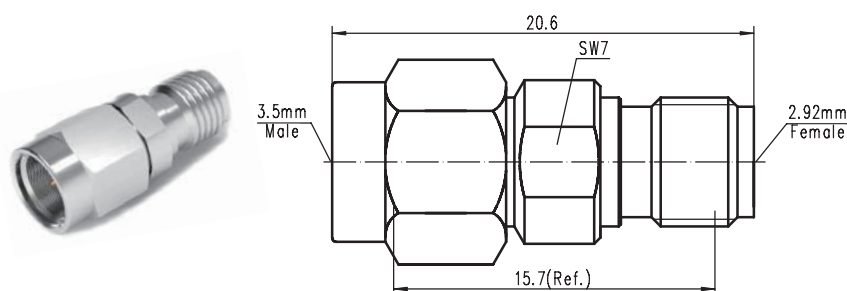

CODE: 100081

TYPE: 3.5mm / 2.92mm - JKG


VSWR: DC - 33GHz...1.15 : 1(max)

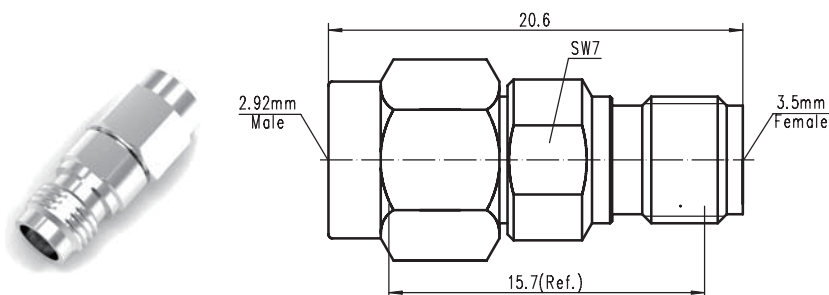

CODE: 100082

TYPE: 3.5mm / 2.92mm - KJG

VSWR: DC - 33GHz...1.15 : 1(max)

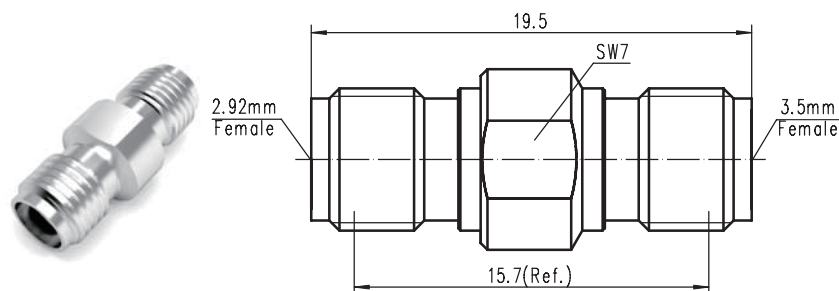

CODE: 100083

TYPE: 3.5mm / 2.92mm - KKG

VSWR: DC - 33GHz...1.15 : 1(max)