


Cable Assemblies Low Insertion Loss Precision N Female / N Female

BLU18B-NfNf-xxxx(T)

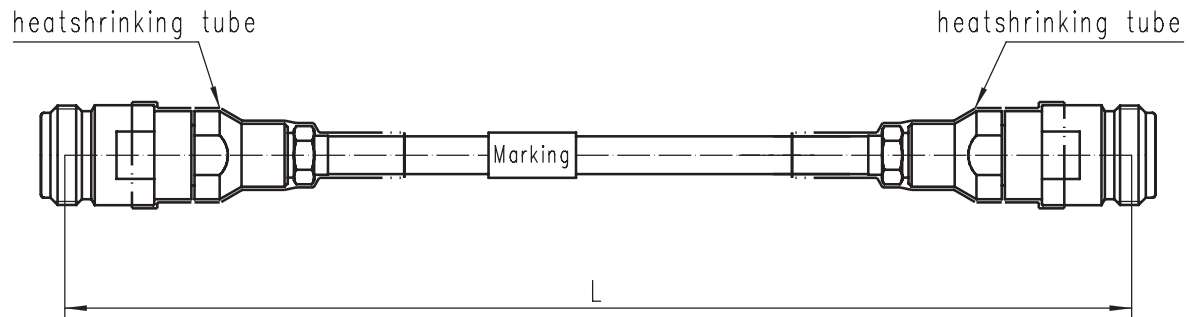

Available Variants

TYPE	"L"(mm)	IL. dB@max 18GHz	Marking	Weight(g)
BLU18B-NfNf-500(T)	500	0.89	Tuyue YWWZZZ BLU18B-NfNf-500	114
BLU18B-NfNf-1000(T)	1000	1.48	Tuyue YWWZZZ BLU18B-NfNf-1000	150
BLU18B-NfNf-2000(T)	2000	2.77	Tuyue YWWZZZ BLU18B-NfNf-2000	222
BLU18B-NfNf-XXXX(T)	XXXX		Tuyue YWWZZZ BLU18B-NfNf-XXXX	

XXXX is cable length and we can follow customer demand. Y - year; ww - Week; zzz - Serial No. .

Assembly Parts

Connector left: N-K210G
 Connector right: N-K210G
 Cable:210B

Electrical data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR	≤1.25 DC to 18GHz
Insertion loss	See table available variants
RF-leakage	≥ 100 dB up to 1 GHz

Mechanical data

Minimum Bend Radius
 Single: 12.5 mm
 Multiple: 38.1 mm
 Jacket Diameter: 5.5 mm

Environmental data

Temperature range	-55°C to +125°C
2002/95/EC (RoHS)	compliant

Shanghai Tuyue Electronics Co. Ltd.

Tel.: +86 21 64753655 Fax: +86 21 61257270
 Email: info@tuyue.com.cn Website:www.tuyue.com.cn