


CALIBRATION ADAPTOR

2.4mm Male – 2.92mm Female

2.92mm/2.4mm-KJG12

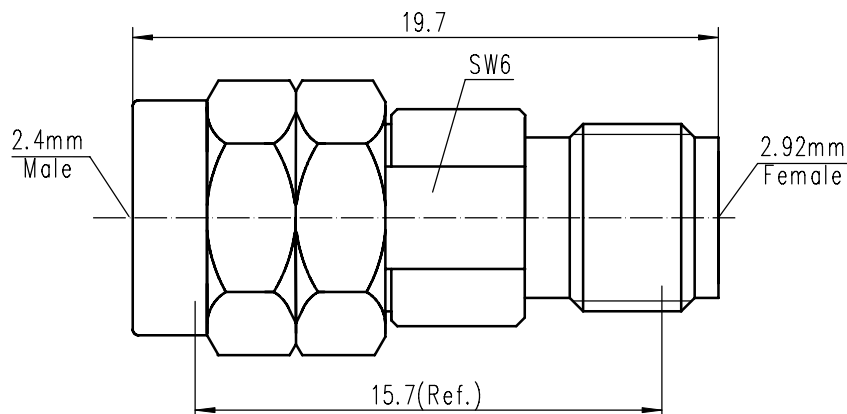

Code: 100283

Electrical data

Impedance	50 Ω	
Frequency	DC to 40 GHz	
Return loss	≤1.12, DC to 40 GHz	
Insertion loss	≤ 0.05 × √f(GHz) dB	
Insulation resistance	≥ 5G Ω	
Center contact resistance	≤ 3.0 mΩ , 2.92 side	≤ 4.0 mΩ, 2.4 side
Outer contact resistance	≤ 2.0 mΩ , 2.92 side	≤ 2.5 mΩ , 2.4 side
Test voltage	500 V rms	
Working voltage	150 V rms	
RF leakage	≥ 100 dB up to 1 GHz	

Mechanical data

Mating cycles	≥ 500
Center contact captivation	≥ 22 N
Coupling test torque 2.92	1.70 Nm
Recommended torque 2.92	0.80 Nm to 1.10 Nm
Coupling test torque 2.4	1.65Nm
Recommended torque 2.4	0.80 Nm to 1.10 Nm

Material and plating

Connector parts	Material	Plating
Center contact	Beryllium copper	Gold, over chemical nickel
Outer contact	Stainless steel	Passivated
Coupling nut	Stainless steel	Passivated
Dielectric	PEI	

Environmental data

Operating Temperature	0°C to +50°C
Storage Temperature	-40°C to +85°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
2002/95/EC (RoHS)	compliant