


2. 92mm - 1.85mm系列间转接器


| 主要性能指标 | | 材料/表面处理 | |
|--------|--------------|---------|-------------|
| 特性阻抗 | 50Ω | 壳体 | 不锈钢SU303 钝化 |
| 频率范围 | DC ~ 40GHz | 内导体 | 铍铜 镀金 |
| 连接器耐久性 | ≥500次 | 绝缘体 | PEI |
| 温度范围 | -60°C~+165°C | | |

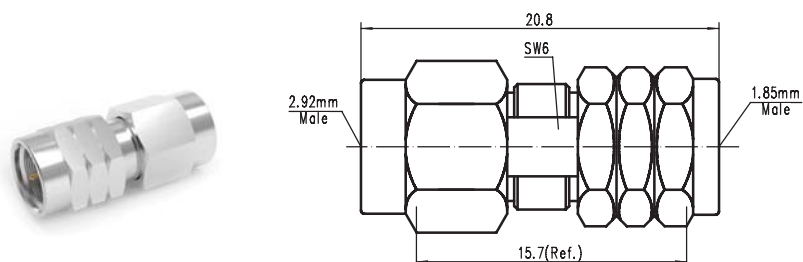

CODE: 100100

TYPE: 2.92mm / 1.85mm - JJG


VSWR: DC - 40GHz...1.20: 1(max)

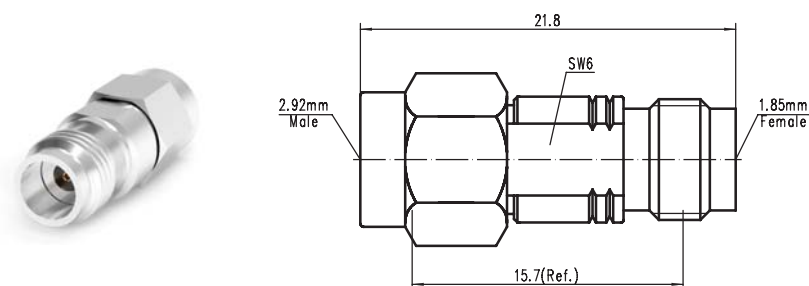

CODE: 100101

TYPE: 2.92mm / 1.85mm - JKG


VSWR: DC - 40GHz...1.20: 1(max)

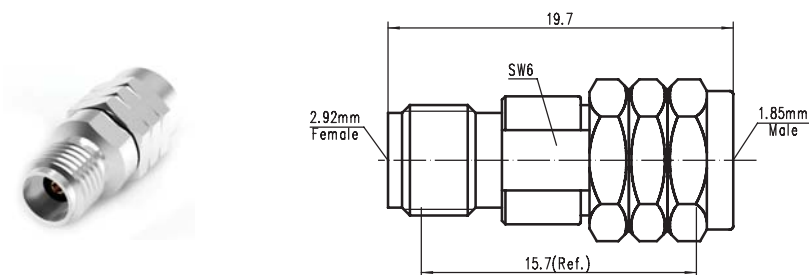

CODE: 100102

TYPE: 2.92mm / 1.85mm - KJG

VSWR: DC - 40GHz...1.20 : 1(max)

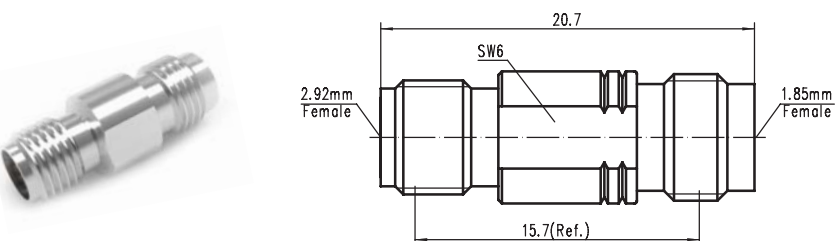

CODE: 100103

TYPE: 2.92mm / 1.85mm - KKG

VSWR: DC - 40GHz...1.20 : 1(max)