


ADAPTOR TNC Male – TNC Female

TNC-JKG

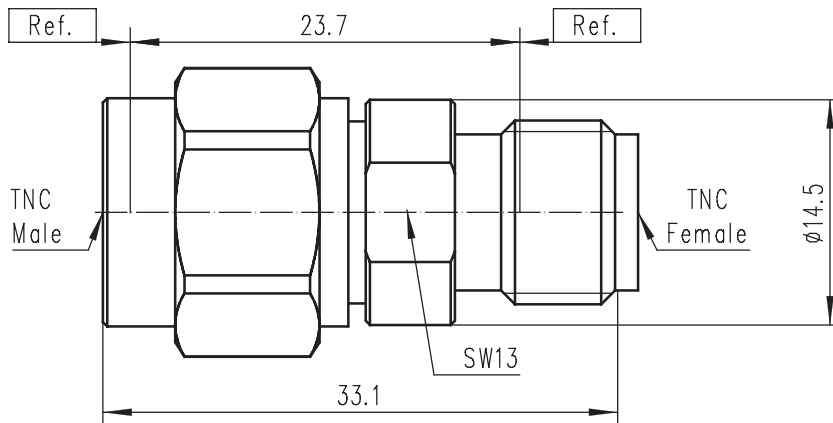

Code: 100131

Electrical data

Impedance	50 Ω
Frequency	DC to 18 GHz
VSWR	≤1.15, DC to 11 GHz
Insertion loss	≤0.35 dB, DC to 11 GHz
Insulation resistance	≥ 5 x10 ³ MΩ
Center contact resistance	≤ 1.5 mΩ
Outer contact resistance	≤ 1.0 mΩ
Test voltage	1500 V rms
Working voltage	500 V rms
RF leakage	≥ 90 dB up to 18GHz

Mechanical data

Mating cycles	min. 500
Center contact captivation: axial	≥ 15 N
Coupling test torque	max. 1.7 Nm
Recommended torque	0.46 Nm to 0.69 Nm

Material and plating

Connector parts

Center contact
Outer contact
Coupling nut
Dielectric

Material

Beryllium copper
Stainless steel
Stainless steel
PEI&PTFE

Plating

Gold, over chemical nickel
Passivated
Passivated

Environmental data

Temperature range	-65°C to +125°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
2002/95/EC (RoHS)	compliant