


# BMA系列内转接器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	黄铜 镀金
频率范围	DC ~ 6GHz	内导体	铍铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃ ~ +165℃		

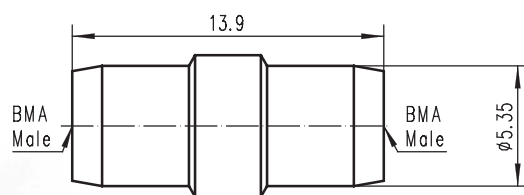

CODE: 100150

TYPE: BMA - JJ


VSWR: DC - 6GHz...1.25 : 1(max)

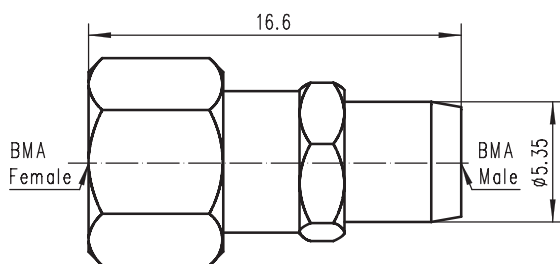

CODE: 100151

TYPE: BMA - JK

VSWR: DC - 6GHz...1.25 : 1(max)

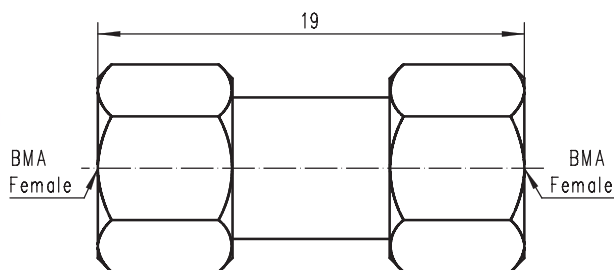

CODE: 100152

TYPE: BMA - KK

VSWR: DC - 6GHz...1.25 : 1(max)