



SMA – BNC系列间转接器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	黄铜 镀金/镀镍
频率范围	DC ~ 4GHz	内导体	铍铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃ ~ +165℃		

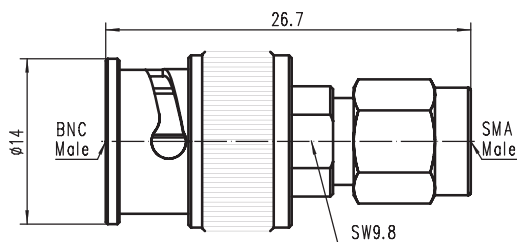


CODE: 100133
 TYPE: SMA / BNC - 50JJ
 VSWR: DC - 4GHz...1.20 : 1(max)

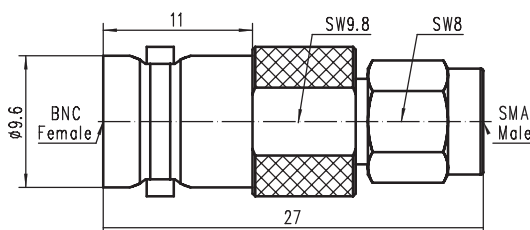

CODE: 100134
 TYPE: SMA / BNC - 50JK
 VSWR: DC - 4GHz...1.20 : 1(max)

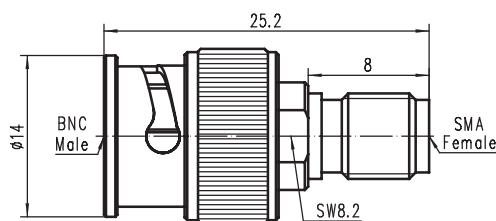

CODE: 100135
 TYPE: SMA / BNC - 50KJ
 VSWR: DC - 4GHz...1.20 : 1(max)

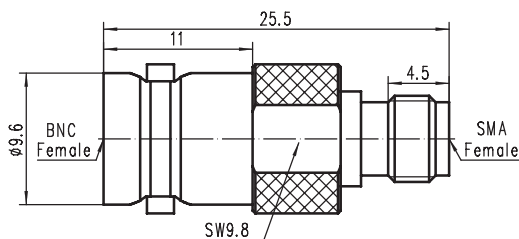

CODE: 100136
 TYPE: SMA / BNC - 50KK
 VSWR: DC - 4GHz...1.20 : 1(max)