



SMA - SMB系列间转接器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	黄铜 镀金
频率范围	DC ~ 6GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃ ~ +165℃		

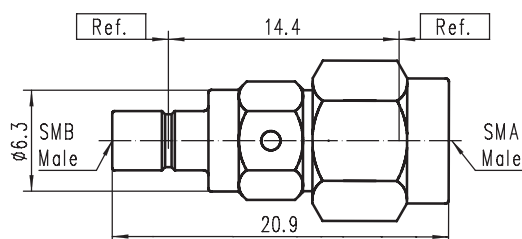


CODE: 100050
 TYPE: SMA / SMB - JJ
 VSWR: DC - 4GHz...1.20 : 1(max)

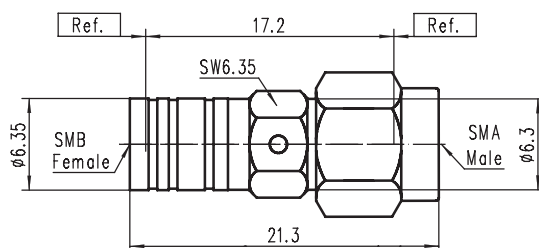

CODE: 100051
 TYPE: SMA / SMB - JK
 VSWR: DC - 4GHz...1.20 : 1(max)

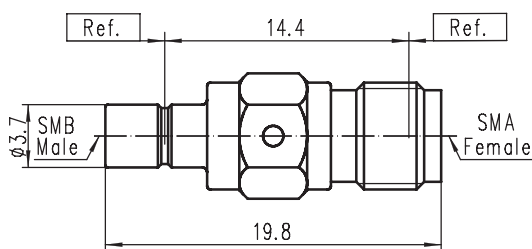

CODE: 100052
 TYPE: SMA / SMB - KJ
 VSWR: DC - 4GHz...1.20 : 1(max)

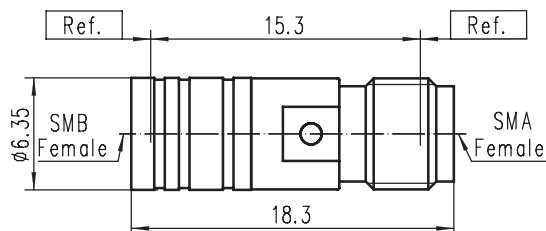

CODE: 100054
 TYPE: SMA / SMB - KK1
 VSWR: DC - 4GHz...1.20 : 1(max)