



SMA – SMP系列间转接器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	SU303 钝化
频率范围	DC ~ 18GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃ ~ +165℃		

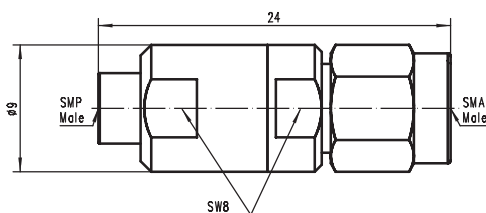


CODE: 100145
 TYPE: SMA / SMP - JJG
 VSWR: DC - 18GHz...1.20 : 1(max)

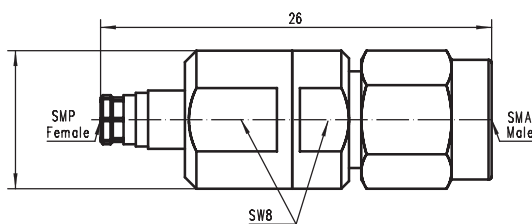

CODE: 100146
 TYPE: SMA / SMP - JKG
 VSWR: DC - 18GHz...1.20 : 1(max)

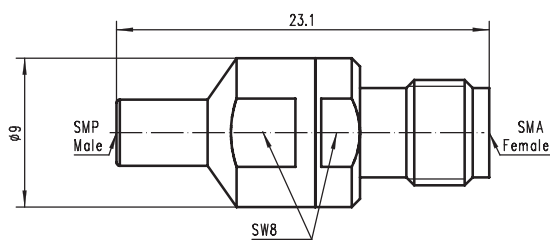

CODE: 100147
 TYPE: SMA / SMP - KJG
 VSWR: DC - 18GHz...1.20 : 1(max)

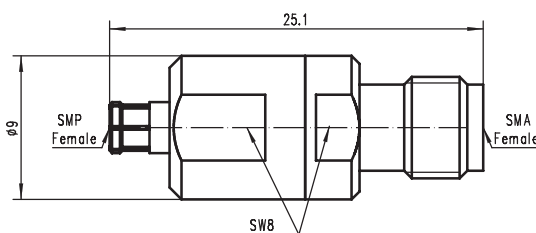

CODE: 100148
 TYPE: SMA / SMP - KKG
 VSWR: DC - 18GHz...1.20 : 1(max)