


SMA - SSMP系列间转换器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	黄铜 镀金
频率范围	DC ~ 18GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃ ~ +165℃		

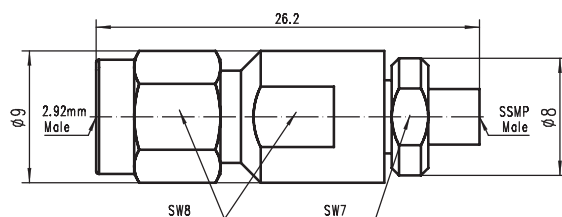

CODE: 100157

TYPE: SMA / SSMP - JJG


VSWR: DC - 18GHz...1.20 : 1(max)

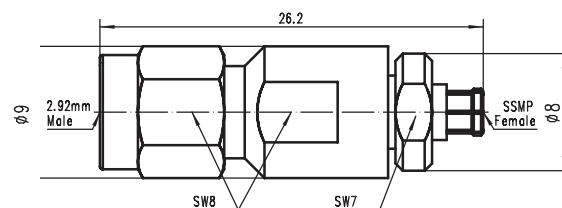

CODE: 100158

TYPE: SMA / SSMP - JKG


VSWR: DC - 18GHz...1.20 : 1(max)

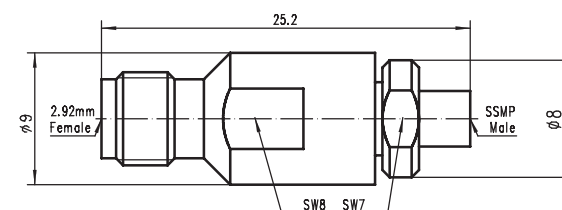

CODE: 100159

TYPE: SMA / SSMP - KJG

VSWR: DC - 18GHz...1.20 : 1(max)

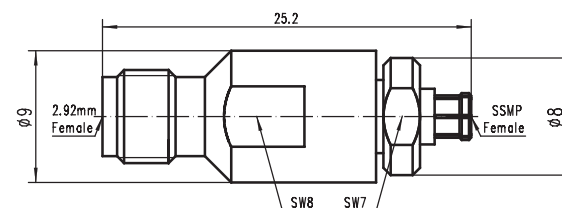

CODE: 100160

TYPE: SMA / SSMP - KKG

VSWR: DC - 18GHz...1.20 : 1(max)