



# SMA SSMA-U. FL/U. FLP/HSC 系列间转接器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	黄铜 镀金或镀镍
频率范围	DC ~ 6GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃ ~ +165℃		

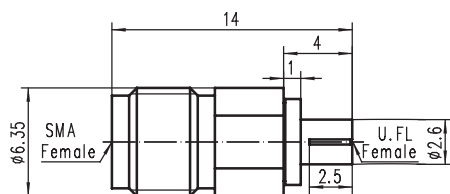


CODE: 100055  
 TYPE: SMA / U.FL - KK  
 VSWR: DC - 6GHz...1.50 : 1(max)

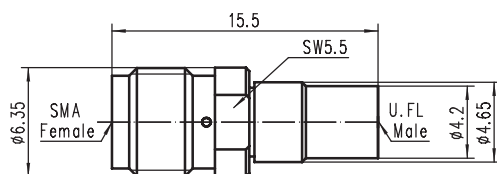


CODE: 100057  
 TYPE: SMA / U.FLP - KK  
 VSWR: DC - 6GHz...1.50 : 1(max)

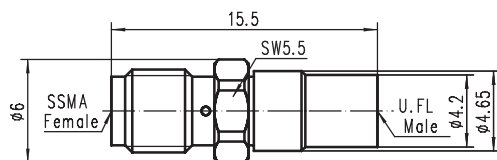

CODE: 100161  
 TYPE: SSMA / U.FLP - KK  
 VSWR: DC - 6GHz...1.50 : 1(max)

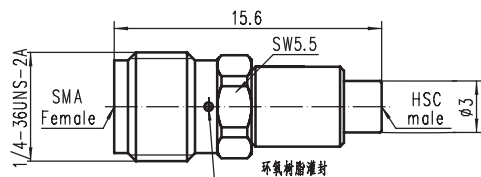

CODE: 100137  
 TYPE: SMA / HSC - KK  
 VSWR: DC - 6GHz...1.50 : 1(max)

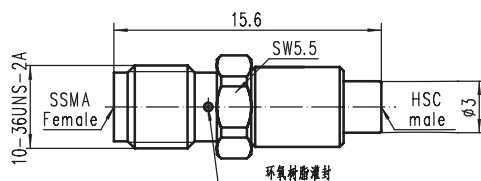

CODE: 100138  
 TYPE: SSMA / HSC - KK  
 VSWR: DC - 6GHz...1.50 : 1(max)