



主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	黄铜 镀金
频率范围	DC ~ 4GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PTFE
温度范围	-60℃ ~ +165℃		

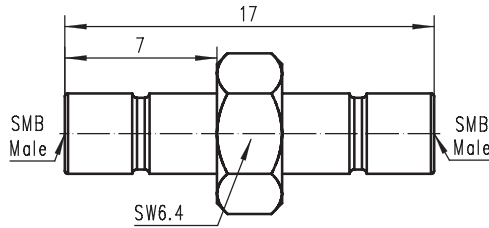

CODE: 100124

TYPE: SMB - JJ


VSWR: DC - 4GHz...1.15 : 1(max)

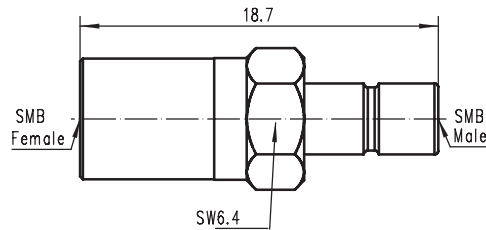

CODE: 100125

TYPE: SMB - JK

VSWR: DC - 4GHz...1.15 : 1(max)

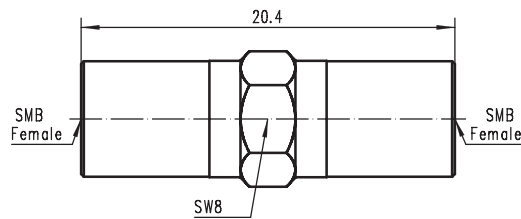

CODE: 100126

TYPE: SMB - KK

VSWR: DC - 4GHz...1.15 : 1(max)