


TNC系列内转接器


| 主要性能指标 | | 材料/表面处理 | |
|--------|--------------|---------|--------|
| 特性阻抗 | 50Ω | 壳体 | 不锈钢 钝化 |
| 频率范围 | DC ~ 11GHz | 内导体 | 镀铜 镀金 |
| 连接器耐久性 | ≥500次 | 绝缘体 | PTFE |
| 温度范围 | -60℃ ~ +165℃ | | |

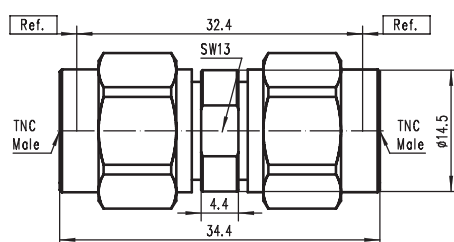

CODE: 100130

TYPE: TNC - JJG


VSWR: DC - 6GHz...1.20 : 1(max)

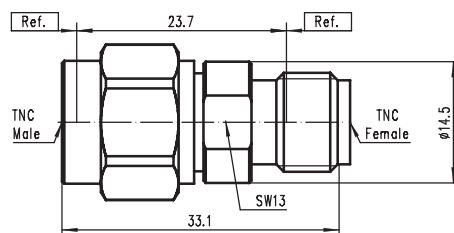

CODE: 100131

TYPE: TNC - JKG

VSWR: DC - 6GHz...1.20 : 1(max)

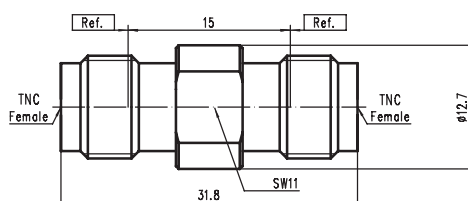

CODE: 100132

TYPE: TNC - KKG

VSWR: DC - 6GHz...1.20 : 1(max)