



TNCA – SMA系列间转换器


主要性能指标		材料/表面处理	
特性阻抗	50Ω	壳体	不锈钢SU303 钝化
频率范围	DC ~ 18GHz	内导体	镀铜 镀金
连接器耐久性	≥500次	绝缘体	PEI
温度范围	-60℃~+165℃		

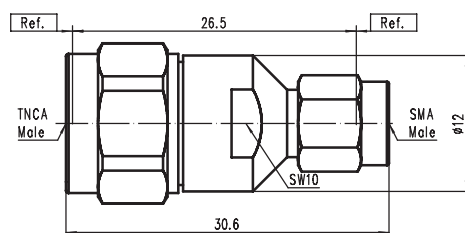


CODE: 100112
 TYPE: TNCA / SMA - JJG
 VSWR: DC - 18GHz...1.20 : 1(max)

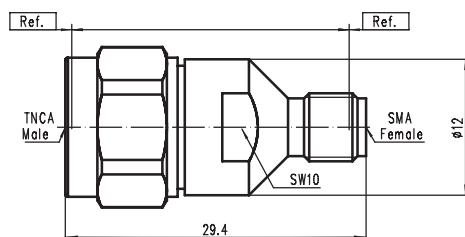

CODE: 1000113
 TYPE: TNCA / SMA - JKG
 VSWR: DC - 18GHz...1.20 : 1(max)

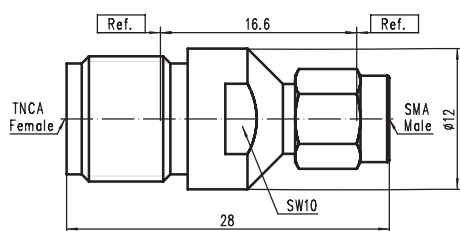

CODE: 100114
 TYPE: TNCA / SMA - KJG
 VSWR: DC - 18GHz...1.20 : 1(max)

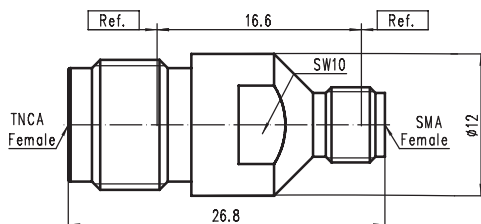

CODE: 100115
 TYPE: TNCA / SMA - KKG
 VSWR: DC - 18GHz...1.20 : 1(max)